



Kymera[®]
INTERNATIONAL

Metallisation
thermal spray solutions



Equipment Specification

MK74 Powder Flame Spray System

INTRODUCTION

The following specification covers the entire standard range of MK74 flamespray system. For the specific offer, please refer to the attached quotation and cross reference the part numbers for each piece of equipment.

Weighing only 1.85kg (4Lb), the Metallisation MK74 powder spray pistol can be hand-held, or machine mounted to spray a wide range of powders. Its robust construction will ensure long periods of trouble-free operation. The MK74 is easy to ignite and has excellent flame stability, thanks to its nozzle system. A special air cap narrows the spray pattern to densify the coating which is particularly beneficial when spraying ceramics where very high deposit efficiencies can be achieved. The MK74 can spray ceramic coatings as well as self fluxing alloys and all other metallic powders.

Safety: The equipment quoted will produce levels of noise and dust that will require safety measures to be taken by those using the equipment. It will use pressurised air and will also use flammable gases. Careful consideration should also be given to the positioning of this equipment. It is the responsibility of the user to ensure that all appropriate measures are taken to ensure safe operation in accordance with local requirements. Metallisation will be pleased to advise as appropriate.

BENEFITS

- High deposit efficiency
- Suitable for spray/fuse coatings
- Quiet operation
- Sprays ceramics and metals
- Powder feed vibrator allows spraying of poor flowing powders
- Optional remote powder feeder
- Integrated feed rate adjustment without changing parts
- Rugged construction combined with light-weight and balance for ease of handling
- Flow meters for optimal setting of parameters and fault finding
- Flow meters include large pointers for ease of checking from a distance
- Air Regulator and Filter (A.R.F.) unit supplies nozzle air and powder feed vibrator air from one inlet.

TYPICAL APPLICATIONS

- Small engineering repairs
- Spray/fused coatings
- Shaft reclamation
- Self fluxing alloys for extreme wear applications
- Glass mould plungers
- Steel mill table rolls


MK74 PISTOL

Part No.	Description
PISTOLS	
GAS-MK74	Gas-Mk74 Powder Pistol - Metal Powders
GAS-MK74-C	Gas-Mk74 Powder Pistol - Ceramic Powders



GAS-MK74
Standard

OPTIONAL ACCESSORIES	
8520HS	MK74 Canister Heat shield (Optional)

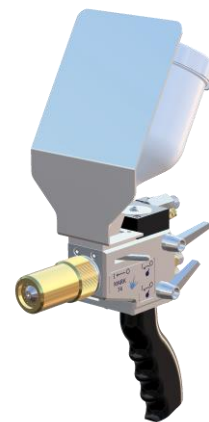

GAS-MK74 with
(optional) Heat Shield

OPTIONAL CONVERSION KITS	
GAS-MK74-CK-M	Mk74 Conversion Kit to change From Ceramics to Metals Spraying
GAS-MK74-CK-C	Mk74 Conversion Kit to change From Metals to Ceramics Spraying
GAS-MK74-CK-PF	Mk74 Conversion Kit to connect to Powder Feeder



GAS-MK74-CK-M



GAS-MK74-CK-C



GAS-MK74-CK-PF

TECHNICAL OVERVIEW

Primarily for spraying engineering coatings (Self Fluxing Alloys, Bond Coat materials and Ceramics).

Flame produced by burning Acetylene and Oxygen gases.

Nozzle designed to provide flame stability and easy lighting.

Finger tip operation of the trigger valve below the canister ensures instantaneous stop/start control of the powder feed.

Simple pistol maintenance for reduced downtime when changing consumables.

Sturdy, robust design for long service life.

The spreader air cap provides a narrow spray pattern and densifies the coating. This is particularly necessary when spraying ceramics.

The optional pistol conversion kits allow easy conversion from one type of pistol to the other.

The optional powder feeder kit is required when the supply of powder is provided by a dedicated powder feeder instead of the pistol mounted powder canister.

POWDER CANNISTER VIBRATOR (INCLUDED) - TECHNICAL OVERVIEW

Requires 21504 – Motor/Vibrator Air Hose x 6m

Pneumatic Vibrator to assist feed of non-free flowing powders.

Supplied with a bolt to fit into the top of the pistol.

An on/off valve is included for air supply.



Technical data

Description	Characteristics
Weight – excluding hoses	1.85kg (4Lbs)
Width	125mm
Length	210mm
Height	335mm
Compressed air usage	27 m ³ /hr @ 6 bar(g), 950 cfh @ 88 psi
Oxygen usage	1.2-2.6 m ³ /hr @ 1.5-2.2 bar
Acetylene usage	0.9-2.28 m ³ /hr @ 0.8-1.03 bar

Typical performance figures for the MK74 pistol

Material	Throughput kg/hr	Deposit Efficiency %
Metallisation Powder 99325/10 Ni/Cr/B/S	5.8	87
Metallisation Powder 99636/16 Ni/Al	4.0-5.8	82
Metallisation Powder 99205/35 Al/Ti Oxide	1.3	83

The gas and oxygen pressure and consumption figures shown cover the full range of possible nozzle assemblies which could be used.

All data provided is an approximation and is offered as guidance only as performance can vary depending on application and parameters.

HOSES

GENERAL SPECIFICATION

Red	Tubing conforms to EN ISO 1256 for Acetylene
Blue	Tubing conforms to EN ISO 1256 for Oxygen
Black	Tubing conforms to EN ISO 1256 for Compressed Air

HOSES FROM REGULATORS TO FLOWMETERS

Part No.	Description
21500/3	Flowmeter Hose Oxygen x 3m
21505/3	Flowmeter Hose Acetylene x 3m



Part number 21500/3
Flowmeter Hose Oxygen x 3m



Part number 21505/3
Flowmeter Hose Acetylene x 3m

Technical overview

Supplied with fittings appropriate to connect to all Metallisation supplied flamespray equipment
Non-standard lengths are available on request

HOSES FROM FLOWMETERS TO PISTOL

Part No.	Description
21182	Acetylene Hose Complete x 6m
21502	Flamespray Oxygen Hose x 6m
21503	Flamespray Nozzle Air Hose x 6m
21504	Motor/Vibrator Air Hose x 6m



Part number 21182
Acetylene hose – 6m



Part number 21502
Oxygen hose – 6m



Part number 21504
Vibrator air hose – 6m




Part number: 21503
Nozzle air hose – 6m

Technical overview

Supplied with fittings appropriate to connect to all Metallisation supplied flamespray equipment
Acetylene and oxygen hoses fitted with safety check valves to prevent back-feeding of gases.
Non-standard lengths are available on request

FLOWMETERS AND MOUNTING PANEL

Part No.	Description
26900A	New Flamespray Mounting Board
21129P	Flowmeter Powder Spray

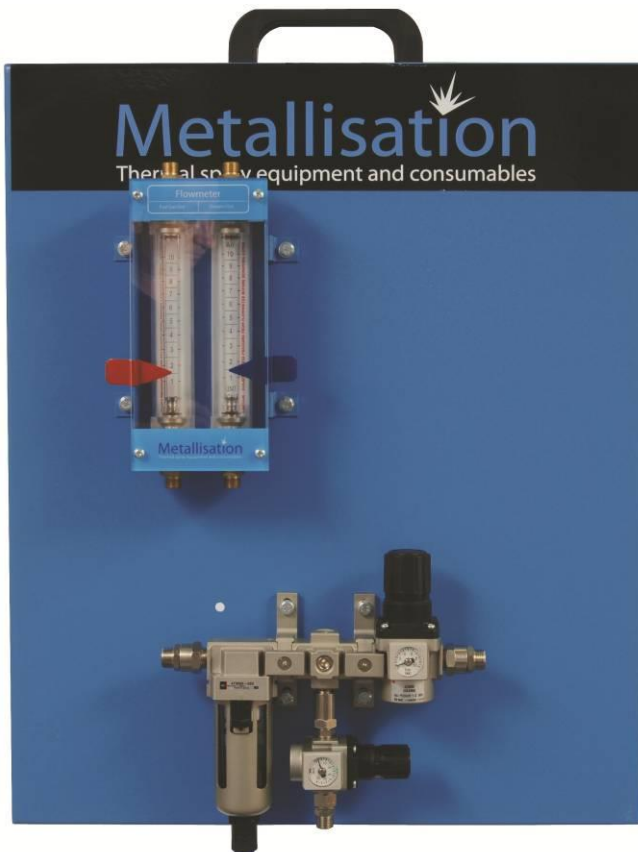

Part number 26900A
Flamespray mounting panel
(Shown with standard ancillaries fitted)



Part number 21129P
Flowmeter Powder Spray

TECHNICAL OVERVIEW

Use with Metallisation regulators to ensure correct mixture of acetylene and oxygen is fed to the pistol to give the optimum flame the material sprayed

Mounted in protective steel and Perspex case to provide protection in industrial environments

Standard left hand threads for fuel gas (acetylene) to avoid incorrect connection

Large floats, indicators and scale divisions offer good visibility at a distance

Used as primary diagnosis tool for fault finding

Flamespray mounting panel (pictured) offers a convenient method of mounting all the required ancillaries (quoted and supplied separately)

REGULATORS

Part No.	Description
21247	3/8" BSP Oxygen Regulator (long supplies)
21231	3/8" BSP Acetylene Regulator (long supplies)



Part number: 21247
Oxygen regulator



Part number: 21231
Acetylene regulator

TECHNICAL OVERVIEW

High flow regulators with minimal restriction offer reliability of operation and more repeatable lighting of the pistol through optimised gas flow rates.

Used together with Metallisation flowmeters and flame arrestors.

Complies with BS5741 and ISO2503 standards.

FLAME ARRESTORS

Part No.	Description
21125	3/8" BSP RH Oxygen Flashback Arrestor
21124	3/8" BSP LH Gas Flashback Arrestor



Part number: 21125
3/8" BSP RH Oxygen Flashback Arrestor



Part number: 21124
3/8" BSP LH Gas Flashback Arrestor

TECHNICAL OVERVIEW

Use together with Metallisation regulators and hoses with check valves for maximum safety.

Mount to the regulator.

Sintered metal flame arrestor quenches the flame front resulting from a flashback.

Pressure relief valve safely vents excess pressure and fumes.

Pressure sensitive cut-off valve, incorporating a tamper-proof reset mechanism, prevents the re-ignition of unburnt gases after a flashback.

AIR REGULATION AND FILTRATION UNIT

Part No.	Description
21222P	Arf Unit – Powderspray



Part number: 21222P
Arf Unit – Powderspray

TECHNICAL OVERVIEW

The ARF unit is made up of a filter bowl and 2 lockable regulators.

High flow and regulation characteristics suitable for flame spray applications.

A single supply feeds 2 outlets for nozzle and powder vibrator air.

Air is unlubricated to ensure clean, uncontaminated coatings.

Snap-lock facility on regulator to prevent accidental changes to settings.

All service parts can be changed without disconnecting hoses for ease of cleaning and maintenance.

Filter bowls have large filter elements for minimum pressure drop.

Filter bowls have sight glasses to prompt the operator to clean bowls.

POWDER FEEDER

Part No.	Description
2022MF-PF(2800)	Mass Flow Powder Feeder, 2.8Ltr Hopper
2022MF-PF(3300)	Mass Flow Powder Feeder, 3.3Ltr Hopper
2022MF-PF(2800)-S	Mass Flow Powder Feeder with Weigh Scales, 2.8Ltr Hopper
2022MF-PF(3300)-S	Mass Flow Powder Feeder with Weigh Scales, 3.3Ltr Hopper
2022MF-PF(2.8)-QR	Mass Flow Powder Feeder, 2.8Ltr with Quick Release Hopper
2022MF-PF(3.3)-QR	Mass Flow Powder Feeder, 3.3Ltr with Quick Release Hopper
QRPFH-2.8	Quick Release Powder Feeder Hopper (2.8 L)
QRPFH-3.35	Quick Release Powder Feeder Hopper (3.35 L)
QRPF-BRKT	Quick Release Powder Feeder Hopper Support Bracket for 2 hoppers
MET-TROL**	Metallisation Ancillary Trolley
6688C	Heater Jacket & Plug Assembly

TECHNICAL OVERVIEW

Mass flow control of carrier gas = repeatability.

Volumetric feed via hopper and rotating disc design.

Two disc variants to allow optimum feeding of a wide range of powders.

Parameters are displayed on the powder feeder.

Feed disc rotational speed is controlled via a closed loop AC inverter for improved feeding accuracy.

Controlled directly at the powder feeder for stand-alone operation.

Multiple power feeders can be integrated into the system.



SPECIFICATION AND SUPPLY REQUIREMENTS

Description	Characteristics
Canister capacity	2,800cc or larger as indicated
Electrical supply	240/110V 1ph, 5A*
Weight	40kg
Dimensions (mm)	W-400 x D-400 x H-700

* Use a suitable MCB or Motor / T rated fuses

PACKAGED SYSTEMS

Our most commonly supplied systems are now being offered as a package with one part number.

Part No.	Description
MK74-36C	MK74 Complete system, 3m input hoses, 6m output hoses for Ceramics
MK74-36M	MK74 Complete system, 3m input hoses, 6m output hoses for Metals

MK74-36C SYSTEM CONSISTS OF:

GAS-MK74-C - Gas-Mk74 Powder Pistol - Ceramic Powders.
Set of 3m input hoses.
Set of 6m output hoses.
New Flamespray Mounting Board.
Powder Spray Flowmeter.
Regulators.
Flashback Arrestors.
Powderspray Arf Unit.
Vibrator Assy.
Tool Kit for Mark 74 Powder Pistol.

MK74-36M SYSTEM CONSISTS OF:

GAS-MK74 - Gas-Mk74 Powder Pistol - Metal Powders.
Set of 3m input hoses.
Set of 6m output hoses.
New Flamespray Mounting Board.
Powder Spray Flowmeter.
Regulators.
Flashback Arrestors.
Powderspray Arf Unit.
Vibrator Assy.
Tool Kit for Mark 74 Powder Pistol.

NOTES



Kymera[®]
INTERNATIONAL

Metallisation
thermal spray **solutions**

Metallisation Ltd

**Peartree Lane
Dudley
West Midlands
DY2 0XH
United Kingdom**

Tel: +44 (0)1384 252464

Fax: +44 (0)1384 237196

Email: sales@metallisation.com

Website: www.metallisation.com